

SLIDING WINDOWS

Innovation to Slim Aesthetics



FACADE **ONE**

Innovative Facade Solutions

SLIDING WINDOW - 2T2S




SLIDING WINDOW - 2T4S



SLIDING WINDOW - 3T3S



SLIDING WINDOW - 3T6S

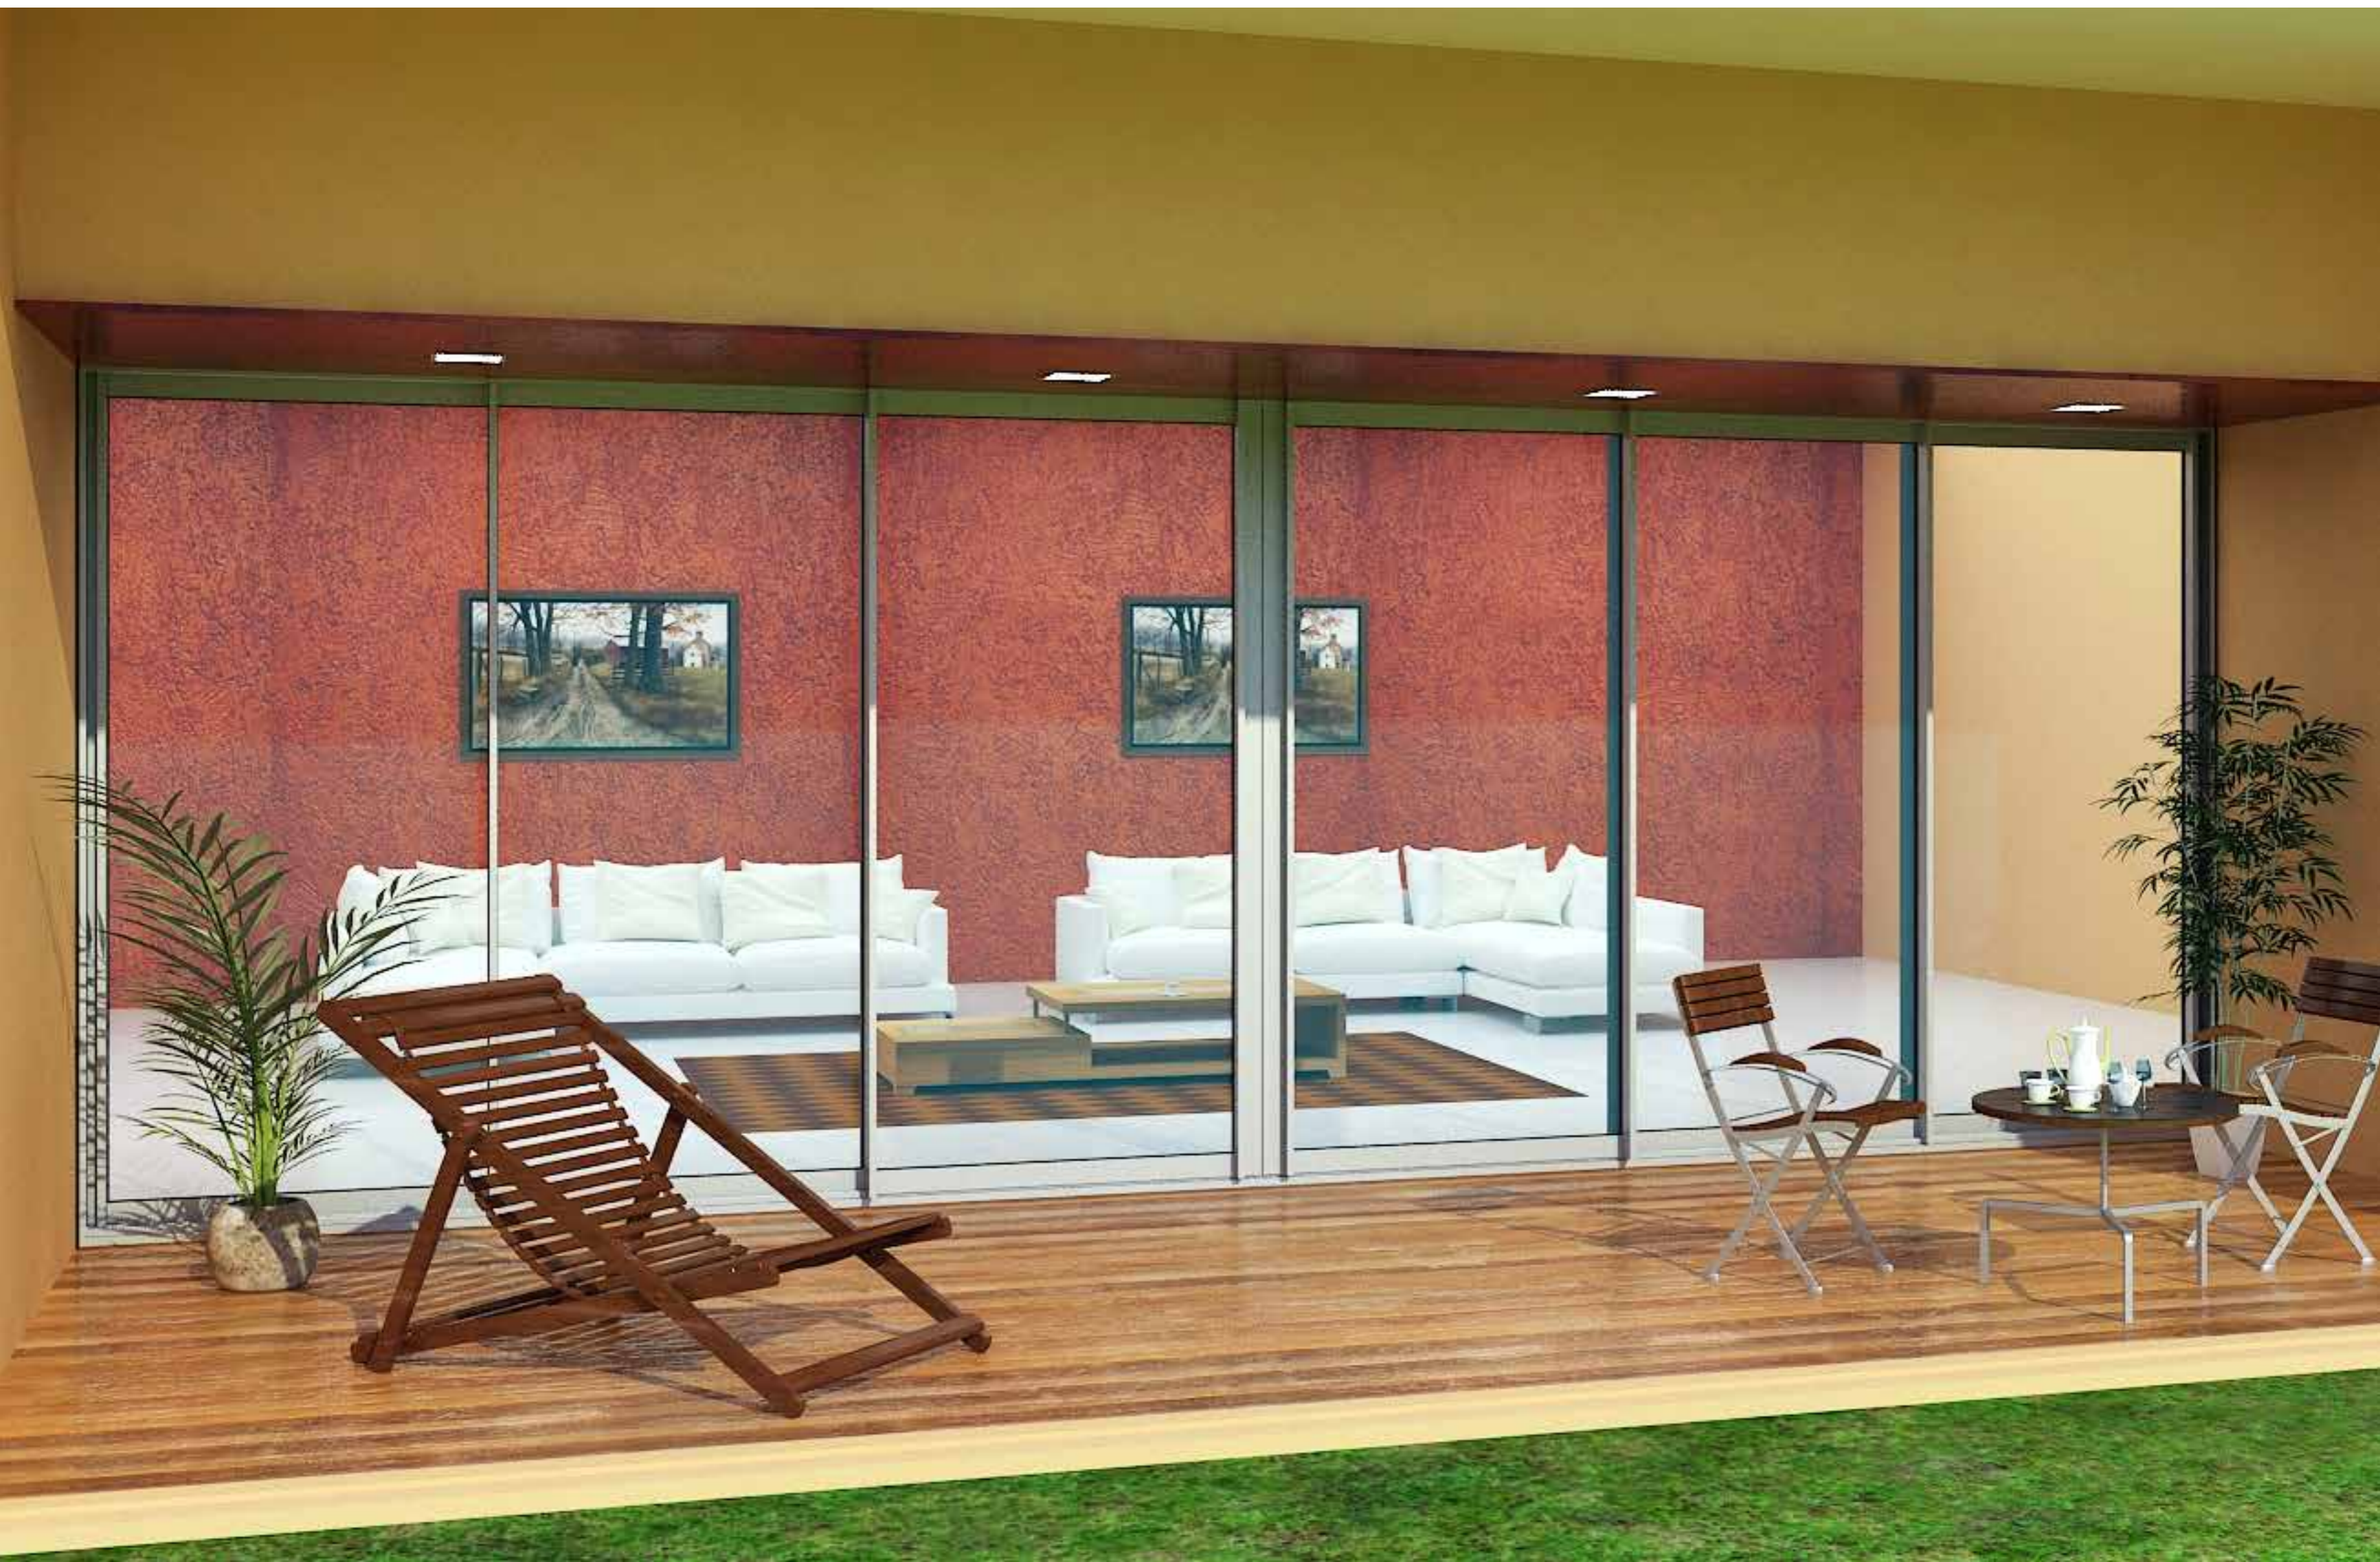

SLIMLINE SLIDING WINDOW - X-2X-X



CORNER WINDOW OUTSIDE VIEW





CORNER WINDOW iNFINITY 352

LIFT AND SLIDE WINDOW

2T2S



FUNGIBLE WINDOWS
Top Bottom Fixed Middle Slide



FUNGIBLE WINDOWS
Top Slide Bottom Fixed




CURTAIN WALL WITH **POPUP WINDOW**




SLIDING WINDOW WITH INBUILT RAILING - 3T3S


SLIDING WINDOW OF THERMAL BREAK VARIANTS

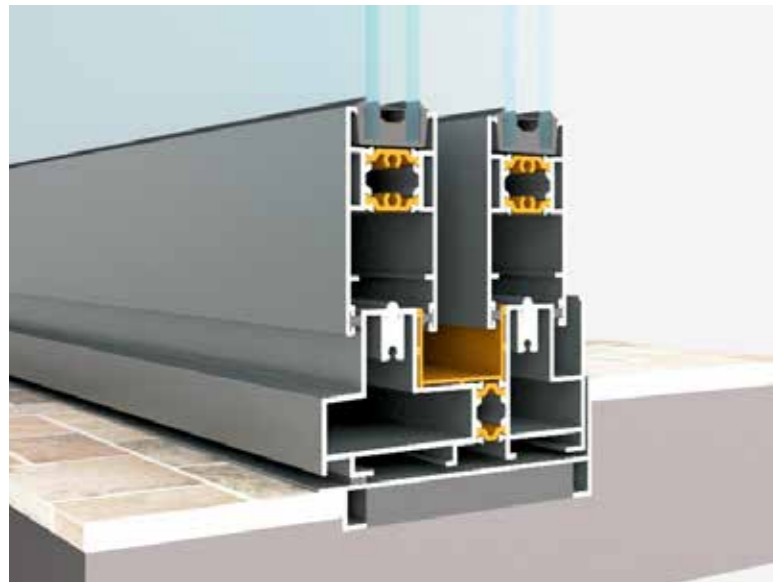


BOTTOM TRACK

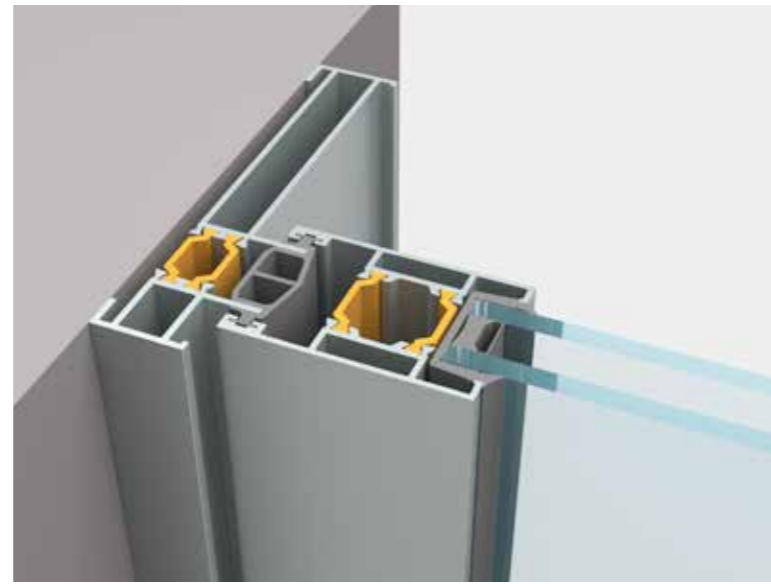


JAMB PROFILE

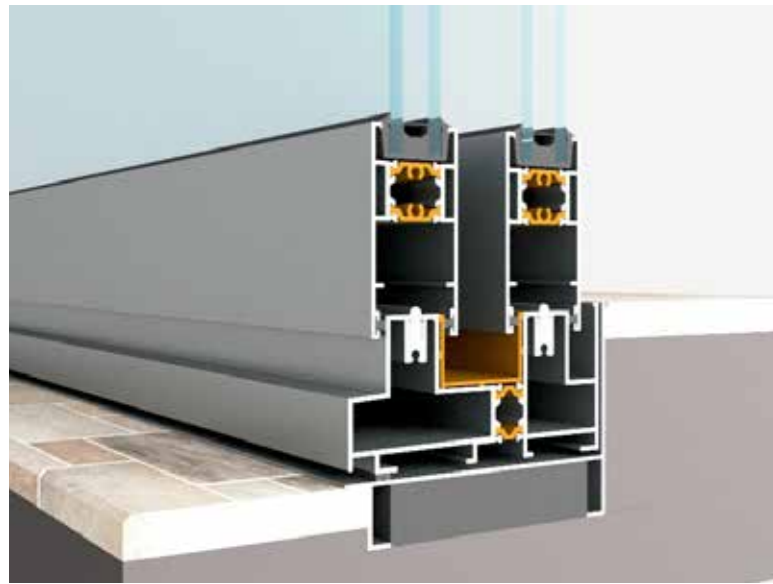

INSIDE FLUSHED TRACK

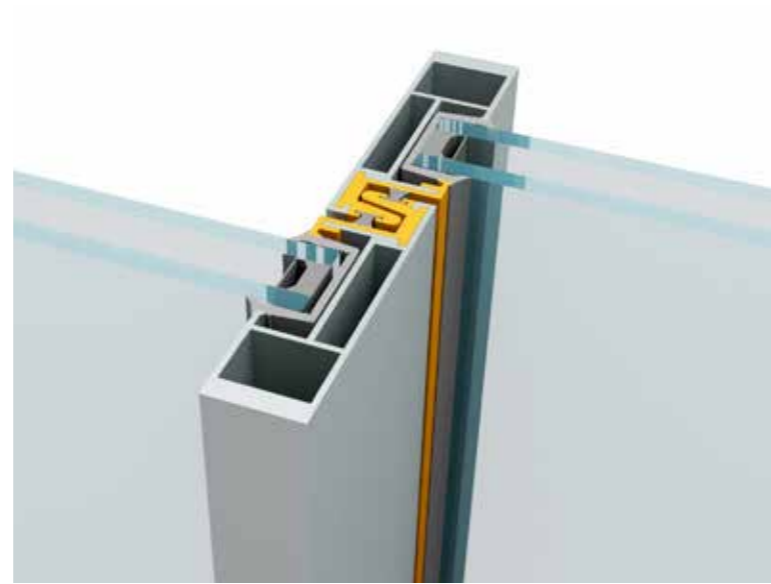

INTERLOCK PROFILE

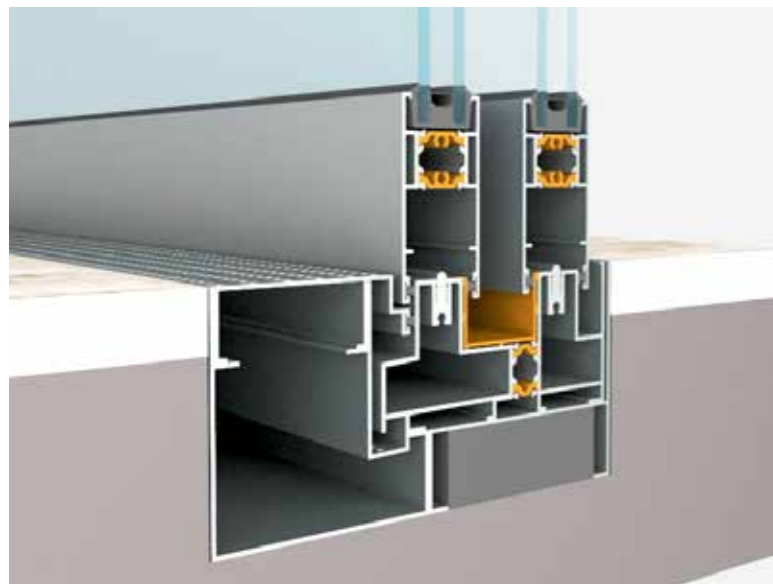


FULL FLUSHED TRACK




CORNER ARRANGEMENT

ALSO CUSTOMIZED AS PER YOUR REQUIREMENT

SLIDING WINDOW DETAILS

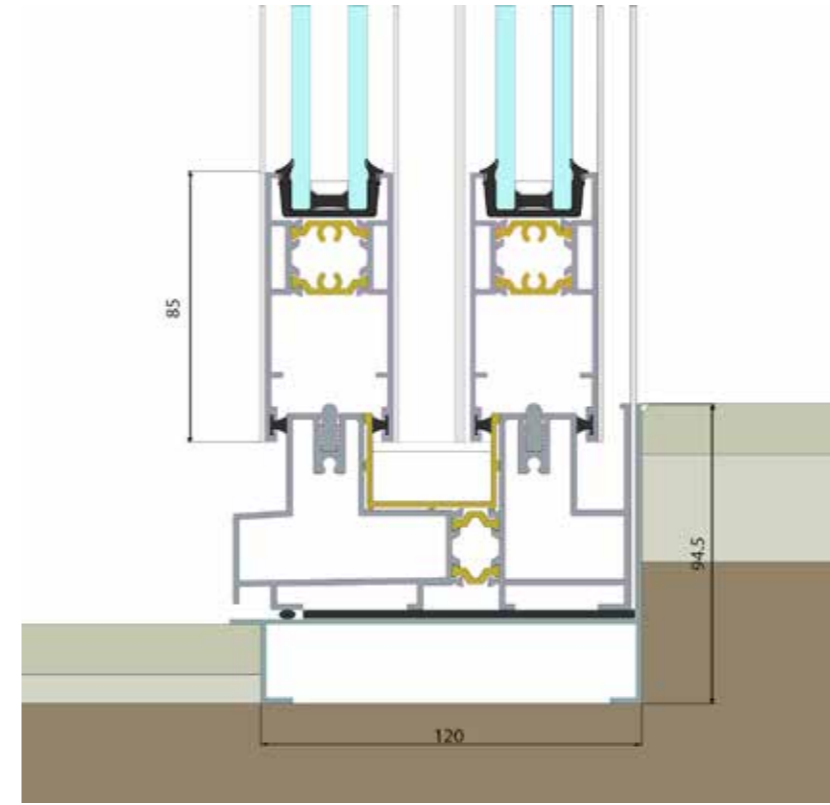

INSIDE FLUSHED TRACK

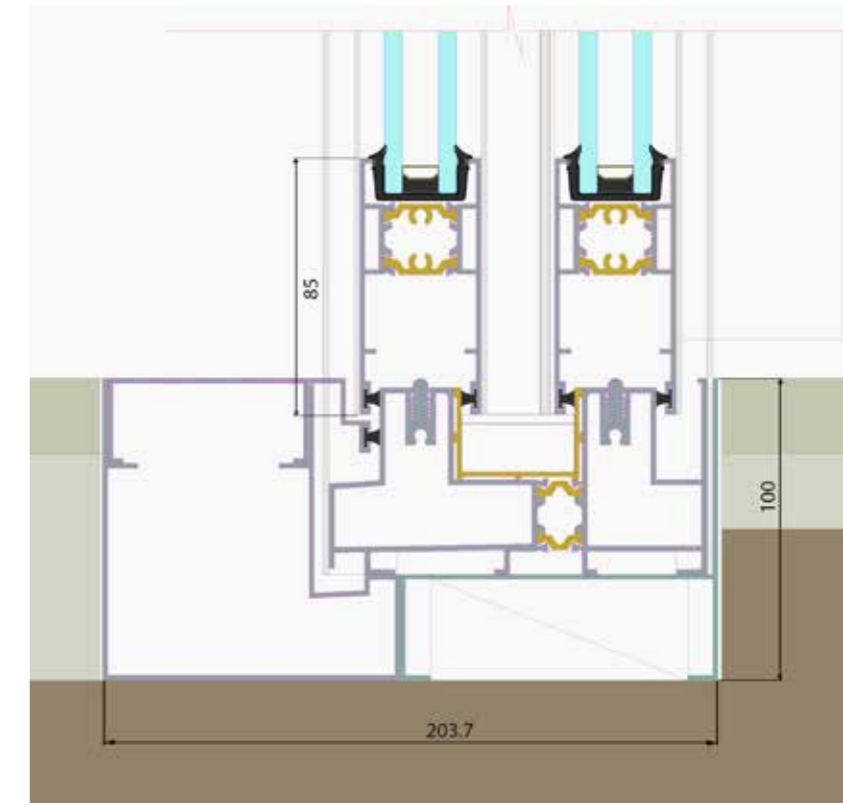

FULL FLUSHED TRACK

PERFORMANCES	
1. MATERIAL	
Aluminium	Alloy 6063 - T6 / 6061 - T6
2. DESIGN STANDARDS	
IBC	International Building Code
BS EN	British Standard European Norm
NFRC	Overall Facade Thermal Resistance Meeting National Fenestration Rating Council (NFRC) Energy Performance Requirement
3. PERFORMANCE	
Wind Load Resistance (Structural) (IBC / ASCE 7)	94 psf (4500 Pa)

The performance values, which can be achieved for specific configurations and opening types, we also customized as per requirement.

(1) The wind load resistance is achieved by structural analysis of profile strength.



FACADE **ONE**
Systems Pvt Ltd.